


● Characteristics

1500 - RTD - THERMOMETER - MODULAR - ECONOMIC

	- Input:	RTD Pt100 (maximum range -50...+200 °C)
	- Output:	4...20 mA current loop HART (2-wire)
	- Voltage supply:	out of current loop (12...40 VDC)
	- Accuracy:	see technical details
	- Process connection:	clamping magnet
	- Electrical connection:	several plugs
	- Temperature range:	-20...+80 °C (ambient)
	- Limit value contacts:	2 electronically (NPN / PNP)
	- Adjustment:	software
	- Material:	stainless steel 1.4571 (medium contact)
- Protection:	at least IP65	

● Technical Data

Input

Sensor RTD Pt100: -50...200 °C (minimum range: 50°C), 4-wire
(Higher ranges up to -50...250 °C available on request)

Output

Current signal: 4...20 mA with superimposed communication signal (HART), 2-wire current loop
Current range: 3,8...20,5 mA
Signal on error: 3,6 mA (sensor short circuit, underflow)
21 mA (sensor break, sensor open circuit, overflow)

Performance

Sensor:	RTD Pt100:	Class A / Class B / Class AA (B1/3 DIN)
Measuring amplifier:	Accuracy:	0,3% of range
	Resolution:	16 Bit
	Filter setting:	0...99 s
	Measuring rate:	10 measurements/s
	Configuration:	via software (HART communication)
	Transmission behaviour:	temperature linear
	Turn-on delay time:	<5 s
	Response time:	20 ms

Programmable Features

Measuring amplifier: Measuring range start (LRV) / Measuring range end (URV) /
Adjustment, simulation of output current / Filter function
Linear output signal / HART address / 2-point calibration

Limit value contacts: limit value 1 and 2 / hysteresis 1 and 2 / delay times 1 and 2

● Applications

For use in climating, ventilating and heating installations and the whole range of industrial application. With it's two configurable limit value contacts, the integrated display and the numerous electrical connections, the temperature sensor is also suitable for applications with higher requirements.



● Technical Data (Continued)

Limit Contacts

Electronically:	2x PNP or NPN (30 VDC, 200 mA) Option: 2x PNP or NPN (30 VDC, 1000 mA)
Indication:	1 LED red for each limit value
Voltage across:	<1 V
Settings:	via software (HART communication)
Setting range:	switch point and hysteresis: any value within measuring range
Switching delay:	0,0...999,9 s
Failsafe function:	adjustable
Galvanical insulation:	switching outputs are separated from measuring amplifier

Supply

Voltage:	HART current loop: 12...40 VDC VDC
Load:	$R = (U_B - 12 \text{ V}) / 21 \text{ mA}$
Reverse battery protection:	available (no function, no damage)


Environmental Conditions

Temperature:	Operating range: -20...+80 °C Attention: Temperatures above +85 °C can destroy the electronics. Medium: -50...+200 °C Storing: -40...+100 °C
Condensation:	uncritical







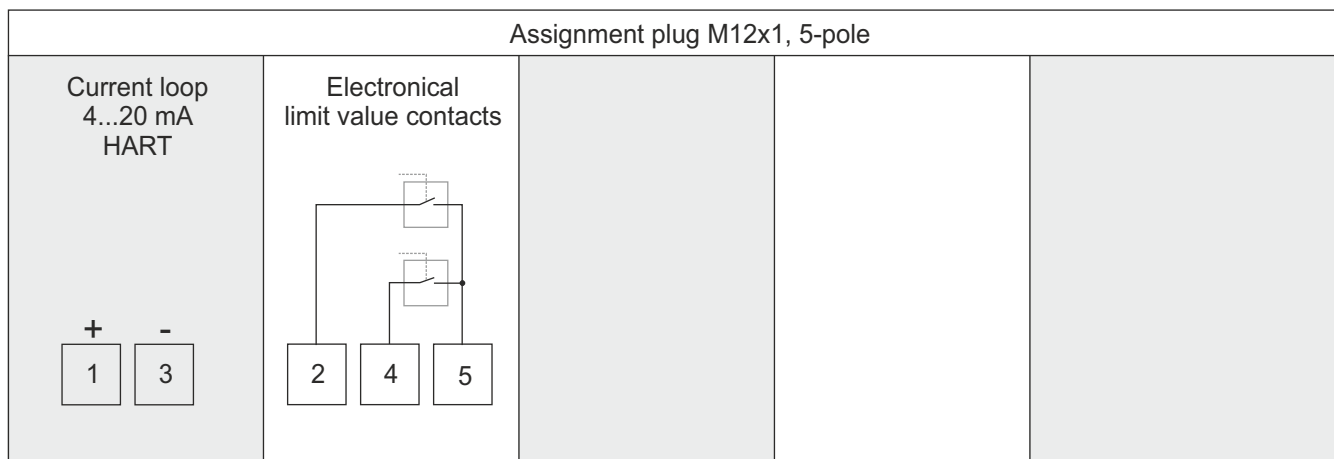

Mechanics

Dimensions:	see page 3
Process connection:	Clamping magnet
Adhesive force of magnet:	66 N
Electrical connection:	see page 3
Material:	Body: PBT GF30 Display head: polycarbonate (makrolon) Sensor body: stainless steel 1.4571 Magnet: alnico 500
Weight:	approx. 259 g (70 mm, 1/2", M12)
Fitting position:	any
System pressure:	PN 25
Protection of device:	Protection class: at least IP 65 (electronics) PCB: potted

● Connection M12x1-Plug (Example)



● Electrical Connection

M12x1	Super Seal	Deutsch	Deutsch	Bayonet	Valve	MIL	Cable
							
4-, 5-, 8-pole	3-pole	3-pole	4-pole	4-pole	4-pole	6-pole	4-pole

Connection	M12 4-pole	M12 5-pole	M12 8-pole	Bayonet 4-pole	Deutsch 4-pole	Deutsch 3-pole	Super Seal 3-pole	Valve 4-pole	MIL 6-pole	Cable 4-pole
Limit value (LV)										
1 electronical LV	X	X	X	X	X			X	X	
2 electronical LV		X	X						X	

● HART Communication

The HART-Tool is a graphical user interface for the ME series with menu-driven program for configuration. It can be used for putting into operation, configuration, analysis of signals, data backup and documentation of the device. Operating systems: Windows 2000, Windows XP, Windows 7, 8.1 and 10.

Connection via HART interface (modem) with USB interface of a PC or hand-held HART communicator

Settings:

- Adjustment of output current
- Simulation of output current
- Filter function
- Limits of measuring range
- Linear output signal
- HART address
- 2-point calibration

Please note: When using communication via a HART modem, a communication resistance of 250 Ω has to be taken into account.

● Dimensions (in mm)

