



MB3 – 3-digit digital panel meter in 96x24mm with bargraph Direct voltage/direct current signals 300 VDC, 1 ADC

- red 3-digit digital display -199...999 Digits (optional green display)
- 30-points-bargraph tricolour
- adjustable bargraph or dot operation or operation with permanent display of the midpoint
- installation depth: 120 mm without plug-in screw terminal
- multi voltage power supply units 100-240 VAC
- display adjustment via factory setting or directly via sensor signal
- min-/max-memory with adjustable permanent display
- 30 additional adjustable support points
- display flashing at threshold value exceedance/undercut
- zero key for the triggering of Hold, Tara, display change, setpoint setting, alarm actuation
- flexible alarm system with adjustable delay times
- volume metering (Totaliser)
- mathematic functions like reciprocal value, root extraction, squaring and rounding
- sliding averaging
- programming interlock via access code
- protection class IP65 at the front
- plug-in screw terminal
- optional: 1 or 2 relay outputs
- optional: 1 independently scalable analog output
- accessories: PC-based configuration-kit PM-TOOL with CD & USB-adapter
- on demand: devices for working temperatures of -25°...60°C

• **Direct voltage, direct current**


Supply 100-240 VAC
DC \pm 10%

horizontal


MB3-3VT3HR.0H01.S70BD

vertical


MB3-3VT3VR.0H01.S70BD

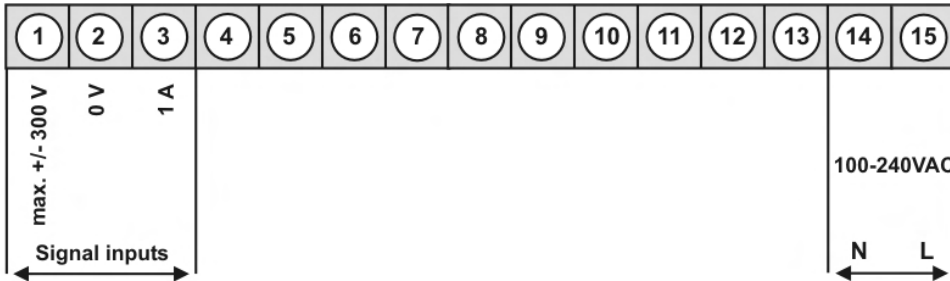

Options:

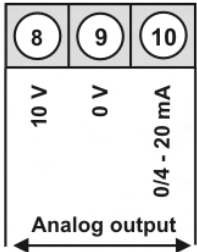

or

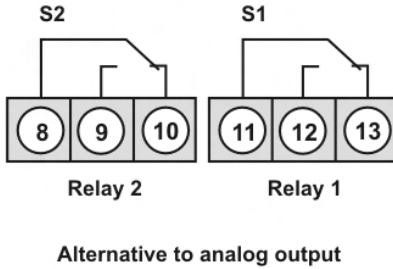

• **Product key options**

M	B	3-	3	V	T	3	H	R.	0	H	0	1.	S	7	0	B	D
M	B	3-	3	V	T	3	V	R.	0	H	0	1.	S	7	0	B	D

EUR

1	1 relay output (with option analog output, only one switching point is possible)
2	2 relay outputs
X	Analog output 0/4-20 mA, 0-10 VDC
G	8 mm green display

Please state physical unit in order, e.g. %.

• **Parameterisation software**

Parameterisation software PM-TOOL, for devices without keypad, for a simple adjustment of standard devices, incl. CD & USB-adapter. Programming is made via an interface on the back.

PM-Tool-MUSB4

• Technical data

Dimensions	Housing	B96 x H24 x T120 mm (T=144 mm incl. plug-in terminal)
	Panel cut-out	92.0 ^{+0.8} x 22.0 ^{+0.3} mm
	Fixing	screw elements for a wall thickness of up to 3 mm
	Housing material	PC Polycarbonate, colour black UL94V-0
	Sealing material	EPDM, 65 Shore
	Protection class	IP65 standard at the front, IP00 at the back
	Weight	approx. 200 g
	Connection	plug-in terminal; wire cross section up to 2.5 mm ²
Display	Display	3-digit, 8 mm high
	Display	-199...999
	Bargraph	30 digit, tricolour
	Segment colour	red, optional green
	Overflow	flashing of the two upper bargraph elements
	Underflow	flashing of the two lower bargraph elements
	Display time	0.01...10.0 seconds
Measuring input	Measuring span	-300...300 VDC / -1...1 ADC
	Measuring range	0... 300 VDC / 0...1 ADC
	Input resistance	R _i at ~1 MΩ / R _i at ~0,2 Ω
	Measuring error	0.5% of final value, ± 1 digit
	Temperature drift	100 ppm/K
	Measuring time	0.1...10.0 seconds
	Measuring principle	U/F-converter
	Resolution	approx. 18 bit at 1 second measuring time
Output	Relay	with change-over contact 250 V / 5 AAC, 30 V / 5 ADC
	Switching cycle	30 * 10 ³ at 5 AAC, 5 ADC ohm resistive load, 10 * 10 ⁶ mechanically
		Separation according to DIN EN50178 / Specific values according to DIN EN 60255
	Analog output	0-10 VDC / burden ≥ 10 kΩ, 0/4-20 mA / burden ≤ 500 Ω, 16 Bit
	Sensor supply	24 VDC / 50 mA 10 VDC / 20 mA
Digital input	Input	< 2.4 V OFF; 10 V ON; max. 30 VDC R _i ~ 5 kΩ
Interface	Protocol	manufacturer-specific ASCII
	RS232	9.600 baud, no parity, 8 dataBit, 1 stopBit
	Wire length	max. 3 m
	RS485	9.600 baud, no parity, 8 dataBit, 1 stopBit
	Wire length	max. 1000 m
Power pack	Supply	100-240 VAC 50/60 Hz / DC +/- 10% (max. 10 VA)
Memory	EEPROM	Data life ≥ 100 years at 25°C
Ambient conditions	Working temperature	0°C to + 50°C
	Storing temperature	-20°C to + 80°C
	Climatic density	relative humidity 0-85% on years average without dew
CE-marking	Conformity according to directive 2004/108/EG	
EMV	EN 61326, EN 55011	
Safety standard	according to directive 2006/95/EG; EN 61010; EN 60664-1	

Housing:

