

## Technical documentation

# MHPS

**● Table of content**

Page 2: Characteristics - applications - technical data

Page 3: Technical data - input quantity - output quantity

Page 4: Electrical connection - process connection

Page 5: 4...20 mA test signal - external operator's control - turning of enclosure

Page 6: Electronics insert with display - HART communication

Page 7: Dimensions - definitions

Page 8: Ordering code

## ● Characteristics

|                            |   |
|----------------------------|---|
| Input:                     | overpressure (0,1 bar up to 1000 bar) / absolute pressure (0,25 bar up to 25 bar) |
| Output:                    | 4...20 mA current loop (15...45 VDC), HART-protocol                               |
| Option:                    | additionally with limit value contacts  |
| Turn down:                 | up to 100:1   |
| Accuracy:                  | <0,25% of sensor range (up to 0,25 bar: <0,5% of sensor range)                    |
| Indication:                | LCD-display with backlighting   |
| Configuration:             | with keys and/or software   |
| Enclosure for electronics: | diecast aluminium (degree of protection: IP65)                                    |
| Process connection:        | G1/2B / G1/4B / G1/4A / 1/2NPT / 1/4NPT / M20x1,5 (pressurized parts: NiCr steel) |

## ● Applications

The pressure sensor is suitable to measure overpressure (negative, positive) and absolute pressure. From overpressure can be derived: level (level, volume, mass). Typical areas of use are chemical industry and process engineering.

## ● Technical data

|                                 |   |
|---------------------------------|---|
| <b>Input</b>                    |   |
| Overpressure:                   | 0,1 / 0,16 / 0,25 / 0,4 / 0,6 / 1 / 2,5 / 4 / 6 / 10 / 16 / 25 / 40 / 60 / 100 / 250 / 400 / 600 / 1000 bar   |
| Absolute pressure:              | 0,25 / 0,4 / 0,6 / 1 / 2,5 / 4 / 6 / 10 / 16 / 25 bar   |
| <b>Output</b>                   |   |
| Analog:                         | 4...20 mA, 2-wire, with superimposed communication signal (HART-protocol)   |
| Signal range:                   | 3,6...22,8 mA (on failure: 3,6 mA)  |
| Option:                         | additionally with limit value contacts  |
| <b>Performance</b>              |   |
| Accuracy:                       | <0,25% of sensor range (up to 0,25 bar: <0,5% of sensor range)  |
| According BFSL:                 | <0,125% of sensor range (up to 0,25 bar: <0,25% of sensor range) including non-linearity, hysteresis, non-repeatability, zero point and full scale error (according to IEC 61298-2) |
| Influences:                     | supply: <0,005% of nominal range/1V<br>vibration: <0,01% of nominal range/g at 200 Hz   |
| Response time 10...90%:         | <1ms (<10 ms at medium temperature <-30°C for nominal ranges up to 25 bar)  |
| Non-linearity:                  | <0,2% of nominal range (BFSL) according IEC 61298-2   |
| Non-repeatability:              | <0,1% of nominal range  |
| Stability:                      | <0,2% of span (1 year, at reference conditions)   |
| Temperature range:              | 0...80°C (compensated, pressure sensor)   |
| Temperature coefficient:        | within compensated range  |
| Mean TC of zero:                | <0,2% of nominal range / 10 K (<0,4% for ranges <0,25 bar)  |
| Mean TC of range:               | <0,2% of nominal range / 10 K   |
| <b>Settings</b>                 |   |
| Rise-delay time:                | 5 s   |
| Cycle time, update:             | 0,25 s  |
| Damping:                        | 200 ms (without consideration of electronic damping)  |
| Filter adjustment:              | 0...160µA   |
| <b>Display</b>                  |   |
| Visible range:                  | 32,5x22,5 mm  |
| Indication:                     | 5-digits 7-segments, 8 mm / 8-digits 14-segments, 5 mm / bargraph with resolution 2%  |
| Range:                          | -19999...99999  |
| <b>Supply</b>                   |   |
| Voltage:                        | 15...45 VDC (current loop)  |
| Insulation resistance:          | >250 MOhm   |
| Short circuit-proof:            | permanent   |
| Reverse battery protection:     | yes (no destruction, no function)   |
| Overvoltage protection:         | 500V  |
| <b>Environmental conditions</b> |   |
| Temperature:                    | Operating: -20...70°C / Ambient: -20...70°C / Storing: -40...+85°C<br>Medium: -30...100°C / -40...125°C   |
| Humidity:                       | 5...98% relative humidity   |
| Shock resistance:               | 1000 g according IEC 60068-2-27 (mechanical shock)  |
| ^Vibration resistance:          | 20 g according IEC 60068-2-6 (vibration at resonance)   |

## ● Technical data (continued)

### Mechanics

|                     |   |                        |
|---------------------|---|------------------------|
| Material:           | Enclosure electronics:  | diecast aluminium      |
|                     | Enclosure pressure sensor:  | CrNi steel             |
|                     | Wetted parts:   | CrNi steel             |
|                     | Type plate:   | stainless steel 1.4301 |
|                     | Viewing glass:  | laminated glass        |
|                     | Internal transmission fluid:  | syntetic oil           |
| Process connection: | G1/2B / G1/4B / G1/4A / 1/2NPT / 1/4NPT / M20x1,5                             |                        |
| Dimensions:         | see page 7  |                        |
| Protection:         | degree IP 65  |                        |
| Weight:             | approx. 1,7 kg  |                        |
| Connection:         | terminal screw (maximum 1,5 mm <sup>2</sup> ), via srewed cable gland M20x1,5 |                        |
| Standards:          | IEC 61000-4-3 / Pressure equipment directive 97/23/EG                         |                        |

### ● Input

**Measurand:** overpressure (positive, negative), absolute pressure  
derived from this: level (level, volume, mass)

**Measuring ranges:** 0,1 bar up to 1000 bar


|                      |      |      |      |      |      |     |     |     |
|----------------------|------|------|------|------|------|-----|-----|-----|
| Pressure range       | 0,1  | 0,16 | 0,25 | 0,4  | 0,6  | 1   | 1,6 | 2,5 |
| Over pressure safety | 1    | 1,5  | 2    | 2    | 4    | 5   | 10  | 10  |
| Burst pressure       | 2    | 2    | 2,4  | 2,4  | 4,8  | 6   | 12  | 12  |
| Pressure range       | 4    | 6    | 10   | 16   | 25   | 40  | 60  | 100 |
| Over pressure safety | 17   | 35   | 35   | 50   | 50   | 80  | 120 | 200 |
| Burst pressure       | 20,5 | 42   | 42   | 96   | 96   | 400 | 550 | 800 |
| Pressure range       | 160  | 250  | 400  | 600  | 1000 |     |     |     |
| Over pressure safety | 320  | 500  | 800  | 1200 | 1500 |     |     |     |
| Burst pressure       | 800  | 1250 | 1300 | 1800 | 3000 |     |     |     |

### ● Output

**Output signal:** 4...20 mA, 2-wire connection  
with superimposed communication signal for HART protocol

**Signal range:** 3,6...22,8 mA

**Load:**  $R_{Lmax} = (U - 15 V) / 0,0228 A$

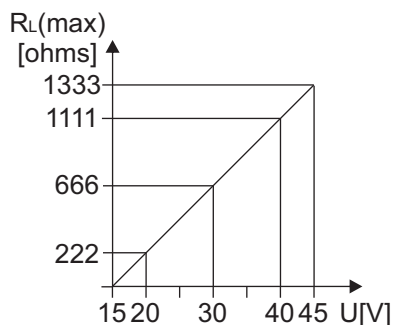

Voltage supply: 15...45 VDC

$R_{Lmax}$ : maximum load resistance

U: Voltage supply



Please note: When using communication via a HART modem, a communication resistance of minimum 250 ohms has to be taken into account.

**Resolution:** current output: 16 bit  
indication: adjustable (factory setting: 0...100%)

**Read cycle time:** HART commands all 200 ms.

**Damping:** continuously adjustable from 0 to 160  $\mu A$  via electronic insert inside the device, hand-held equipment or PC-software. Factory configuration: 0  $\mu A$

● **Electrical connection**

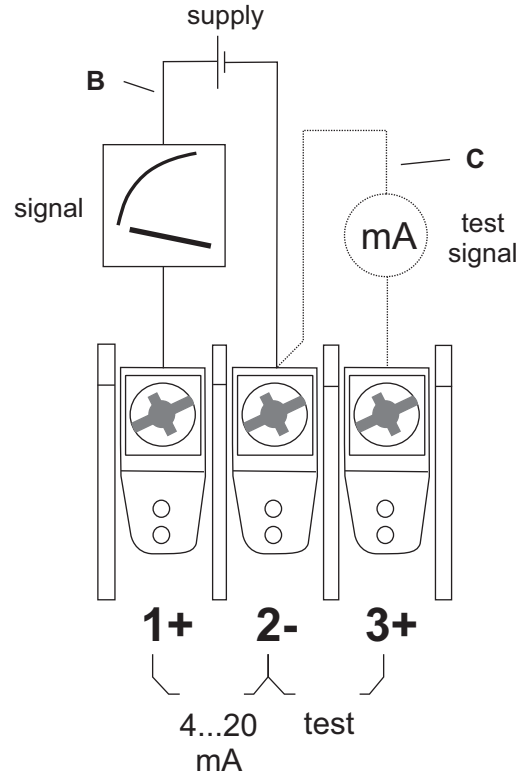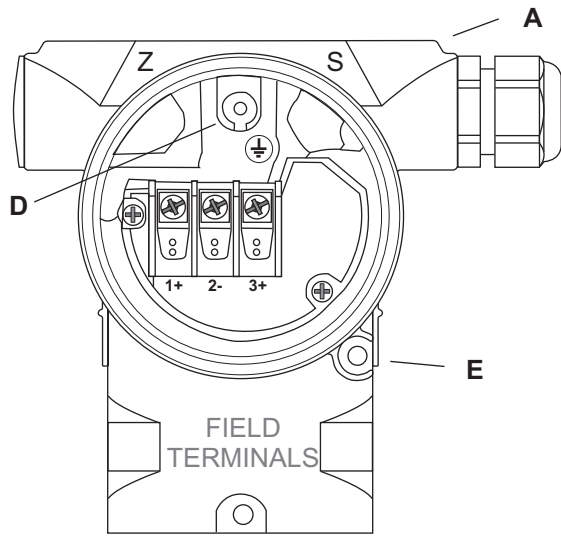

Electrical connection 4...20 mA HART

- A: Enclosure
- B: Voltage supply 15...45 VDC (1+ / 2-)
- C: 4...20 mA test signal between 2- and test point 3+
- D: Internal earthing
- E: External earthing

The device has a protective system against overvoltage peaks, RF interferences and wrong polarity.

Voltage supply: between 15 ...45 VDC

Cable entry: screwed cable gland M20x1,5 (metal)


Cable: outer diameter: 6...12 mm  
cross-sectional area: 0,5...1,5 mm<sup>2</sup>  
shielded and twisted 2-wire cable (recommended)

Residual ripple: no influence on mA-signal up to 5% within nominal voltage range

Influence supplied power: <0,005% of nominal range / 1V

● **Process connection**

G1/2 (EN837) manometer

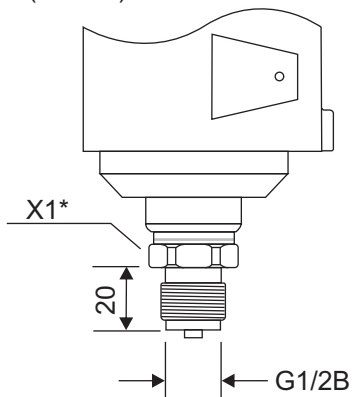

**Pressure connection:**


- G1/2B manometer (EN837)
- G1/4B manometer (EN837)
- G1/4A (DIN3852-E)
- M20x1,5
- 1/2NPT
- 1/4NPT

**Measuring membrane:**


NiCr-steel

\*X1: width across 27


G1/4 (DIN 3852-E)




G1/4 (EN837) manometer




1/2NPT



1/4NPT




● **4...20 mA test signal**

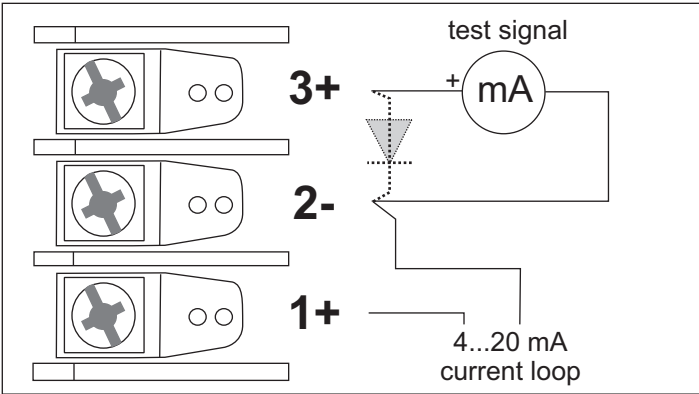

The 4...20 mA test can be measured without interruption of the low-potential circuit between terminal 3(+) and terminal 2(-). The output current is measured with an ammeter for mA across a diode in the output circuit.

● **External operator's control**

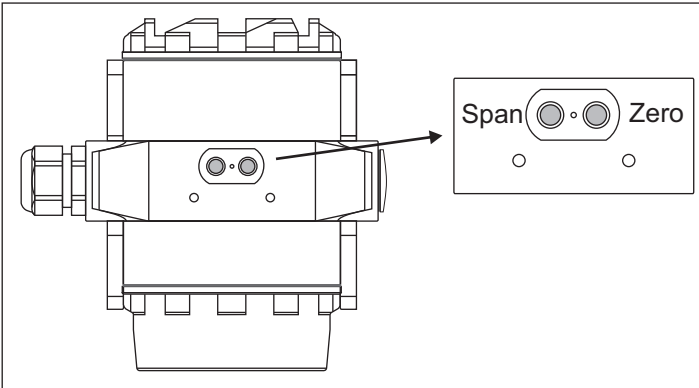



Below the type plate there are 2 key button for easy configuration of zero and span. The keys are Hall effect devices and are completely separated from other parts of the enclosure.

- Advantages:
- Protection against environmental influence
  - without wear
  - ease of operation


● **Rotating of enclosure**

After unscrewing the M6 Allen screw the enclosure can be rotated up to 360°.

**Advantages:**  
 Good reading of the display  
 Operator's controls of the device are easy approachable

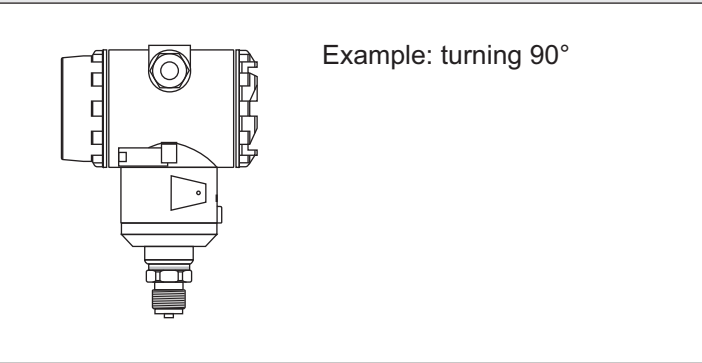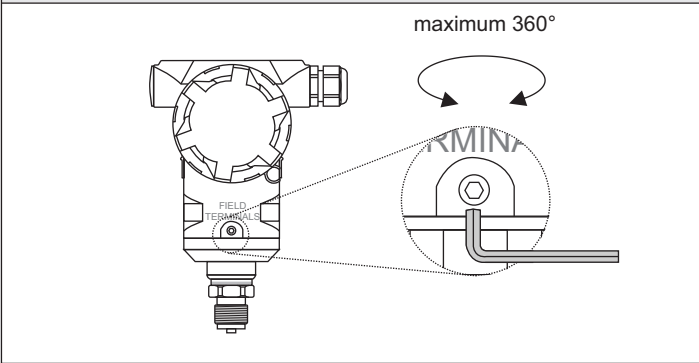


● **Accessories**

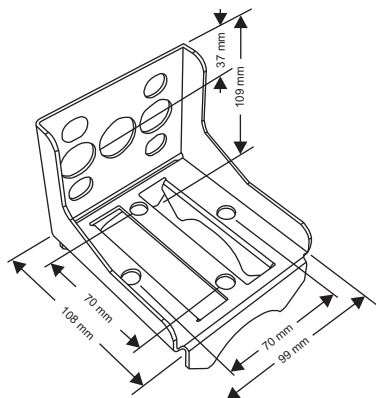

Holder wall / tube:  
 Holder made of stainless steel for mounting the device on walls or tubes.  
 Supplied parts: holder, fixing clamp with nuts and washers.

## ● Electronic insert with display


### Display with key buttons for configuration



The display is rotatable for approx. 330°  
 With 3 operator's keys is configurable:


- Starting measuring value (reference pressure has to be supplied)
- Final measuring value (reference pressure has to be supplied)
- Zero offset compensation (compensation of position)
- Reset
- Starting measuring value (reranging without reference pressure)
- Final measuring value (reranging without reference pressure)
- Damping
- Unit (mA, mbar, %)
- Fixed current output

### Display



- Visible range 32,5x22,5 mm
- 5-digits 7-segment line, 8 mm high (-19999...99999)
- 8-digits 14-segment line, 5 mm high
- Bargraph with resolution 2%

### Electronics



- XS1 voltage supply 15...45 V
- XS2 connection sensor
- XS3 external keys
- XS7 display
- J1 solder bridge to select sensor supply

## ● HART Communication

### HART tool:

The HART-Tool is a graphical user interface for the MH series with menu-driven program for configuration. It can be used for putting into operation, configuration, analysis of signals, data backup and documentation of the device. Operating systems: Windows 2000, Windows XP

### Functions:

- Configuration of the devices in on-line operation
- Loading and storing the devices data (upload / download)
- Linearization of characteristic curve
- Documentation of the measuring point

### Possible HART devices to use:


- HART interface (modem) with serial interface of a PC
- HART interface (modem) with USB interface of a PC
- Hand-held HART communicator

## ● Configuration with software via HART communication

The following settings are possible:

- |  |                                   |
|--|-----------------------------------|
| - Adjustment of output current   | - Simulation of output current    |
| - Configurable characteristic values:<br>limits of measuring range<br>filter function<br>linear / square root output signal for flow | unit for display<br>decimal-place |
| - HART address   | - HART TAG number                 |
| - 2-point calibration (start and end of value)   | - 6-point calibration             |

● **Dimensions (in mm)**

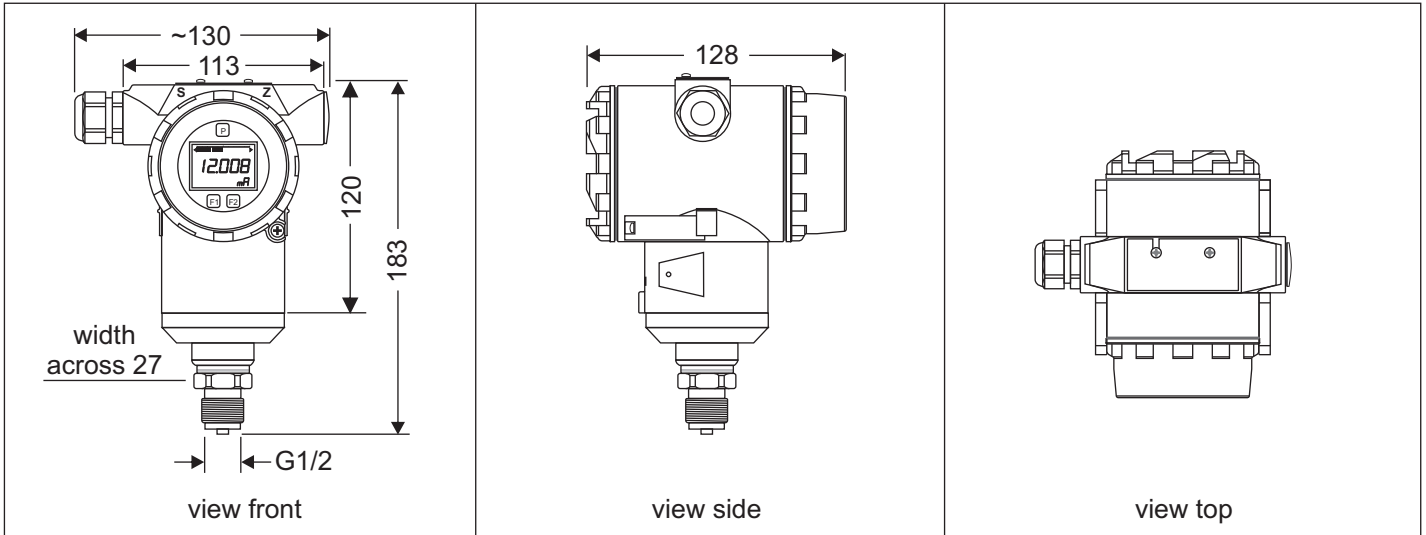


● **Definitions**

LRL: lower range limit  
 LRV: lower range value  
 TD: turn down


URL: upper range limit  
 URV: upper range value

**Example 1**

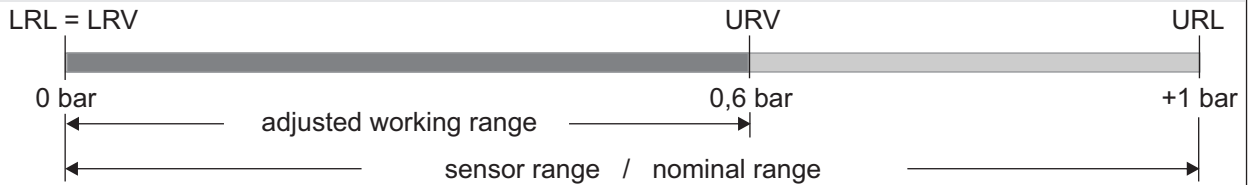


**|LRV| < |URV|:** lower range value (LRV) = 0 bar upper range value (URV) = 0,6 bar  
 upper range limit (URL) = 1 bar  
**Turn down:** URL / |URV| = 1 bar / 0,6 bar Turn down = 1,66 : 1  
**Set span:** URV - LRV = 0,6 bar - 0 bar set span = 0,6 bar  
 (adjusted) (The span is based on the zero point)

**Example 2**

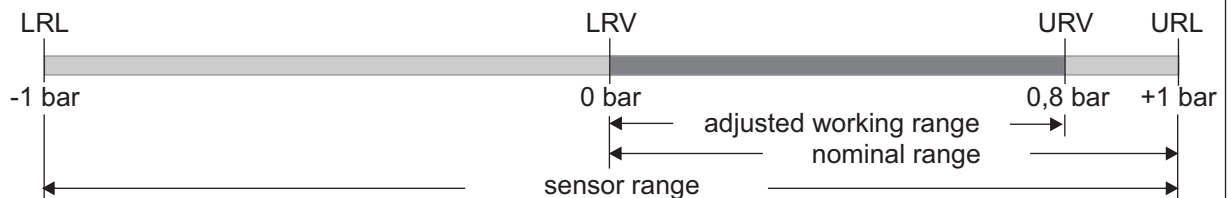

**|LRV| < |URV|** lower range value (LRV) = 0 bar upper range value (URV) = 0,8 bar  
 upper range limit (URL) = 1 bar mbar  
**Turn down:** URL / |LRV| = 1 bar / 0,8 bar Turn down = 1,25 : 1  
**Set span:** URV - LRV = 0,8 bar - 0 bar set span = 0,8 bar  
 (adjusted) (The span is based on the zero point)

**Example 3**

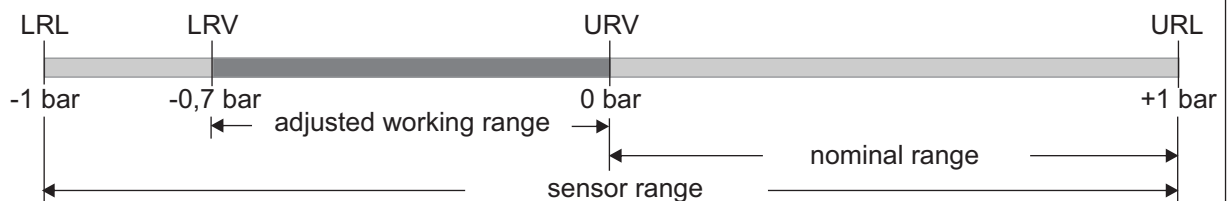

**|LRV| > |URV|** lower range value (LRV) = -0,7 bar upper range value (URV) = 0 bar  
 upper range limit (URL) = 1 bar  
**Turn down:** URL / |LRV| = 1 bar / 0,7 bar Turn down = 1,43 : 1  
**Set span:** URV - LRV = 0 bar - (-0,7 bar) set span = 0,7 bar  
 (adjusted) (The span is based on zero point)

● **Ordering code**

**H P X X X X X X - X X X**

|  |   |   |   |  |  |  |  |  |  |  |  |  |   |
|--|---|---|---|--|--|--|--|--|--|--|--|--|---|
| <b>Output:</b>                                   | 4...20 mA (HART)  | 0 |   |  |  |  |  |  |  |  |  |  |   |
|  | 4...20 mA (HART), electrical limit contacts <sup>1)</sup> | 1 |   |  |  |  |  |  |  |  |  |  |   |
| <b>Kind of pressure:<sup>2)</sup></b>            | relative  | 0 |   |  |  |  |  |  |  |  |  |  |   |
|  | absolute  | 1 |   |  |  |  |  |  |  |  |  |  |   |
|  | relative (±)  | 2 |   |  |  |  |  |  |  |  |  |  |   |
| <b>Pressure range:<sup>3)</sup></b>              | (please indicate)   |   | X |  |  |  |  |  |  |  |  |  |   |
| <b>Process connection:</b>                       | G 1/2 (EN 837), manometer                                 |   |   |  |  |  |  |  |  |  |  |  | 0 |
|  | G 1/4 (EN 837), manometer                                 |   |   |  |  |  |  |  |  |  |  |  | 1 |
|  | G 1/4 (DIN 3852 E)  |   |   |  |  |  |  |  |  |  |  |  | 2 |
|  | 1/2 NPT   |   |   |  |  |  |  |  |  |  |  |  | 3 |
|  | 1/4 NPT   |   |   |  |  |  |  |  |  |  |  |  | 4 |
|  | M20x1,5   |   |   |  |  |  |  |  |  |  |  |  | 5 |
| <b>Material process connection:<sup>4)</sup></b> | 1/4-18 NPT 1.4435 (316L)                                  |   |   |  |  |  |  |  |  |  |  |  | 0 |
| <b>Temperature medium:</b>                       | -30...+100 °C   |   |   |  |  |  |  |  |  |  |  |  | 0 |
|  | -40...+125 °C   |   |   |  |  |  |  |  |  |  |  |  | 1 |
| <b>Enclosure / connection:</b>                   | diecast aluminium with screwed cable gland M20x1,5        |   |   |  |  |  |  |  |  |  |  |  | 0 |
| <b>Configuration:</b>                            | factory configuration <sup>5)</sup>                       |   |   |  |  |  |  |  |  |  |  |  | 0 |
|  | customized configuration (please indicate) <sup>6)</sup>  |   |   |  |  |  |  |  |  |  |  |  | 1 |
| <b>Other / accessories:</b>                      | special model   |   |   |  |  |  |  |  |  |  |  |  | 0 |
|  | HART Interface, USB, software                             |   |   |  |  |  |  |  |  |  |  |  | 1 |
|  | Holder wall / tube (stainless steel)                      |   |   |  |  |  |  |  |  |  |  |  | 3 |

1) For more details see the corresponding data sheet:  
 - MH-LVE for electrical limit value contacts

2) relative: positive overpressure, negative overpressure (subatmospheric pressure)  
 relative (±): above and below the prevailing atmospheric pressure

3) Coding for X (pressure ranges), given in bar:  
 relative pressure: 0 = 0...0,1 / 1 = 0...0,16 / 2 = ...0,25 / 3 = 0...0,4 / 4 = 0...0,6 / 5 = 0...1 / 6 = 0...1,6 /  
 7 = 0...2,5 / 8 = 0...4 / 9 = 0...6 / A = 0...10 / B = 0...16 / C = 0...25 / D = 0...40 / E = 0...60 / F = 0...100 /  
 G = 0...160 / H = 0...250 / I = 0...400 / J = 0...600 / K = 0...1000 / L = -1...0  
 absolute pressure: 2 = ...0,25 / 3 = 0...0,4 / 4 = 0...0,6 / 5 = 0...1 / 6 = 0...1,6 / 7 = 0...2,5 / 8 = 0...4 /  
 9 = 0...6 / A = 0...10 / B = 0...16 / C = 0...25 /  
 relative pressure (±): M = -1...+1

4) Material in contact with medium: CrNi steel

5) zero: 4,000 mA / span: 20,000 mA / zero offset compensation: without / turn down: without /  
 calibration points: 2 / damping: without / display mode: 100% / output on alarm: 3,6 mA / fixed output: without

When the MH-device is ordered with factory configuration this limiting value unit will have the following settings:

- Range of indication: 4,0...20,0
- Refresh display: 1 s
- Decimal point: XX.xx
- Unit: without
- Stabilisation zero point: 2
- Limit value 1: trigger value 12 mA / delay time: 0 s
- Limit value 1: reset value 11 mA / delay time: 0 s
- Limit value 2: trigger value 18 mA / delay time: 0 s
- Limit value 2: reset value 16 mA / delay time: 0 s
- Locking of programming: without
- Calibration points: without
- TAG number: 0

6) the possibilities of the technical data can be selected. In case of not given values the details of factory-set are used.