



Ambient conditions Working temperature 0 up to +60 °C
 Storing temperature -20 up to + 80 °C
 Climatic conditions rel. humidity ≤75% in the annual mean without formation of condensation

EMV DIN 61326

CE-sign Conformity in accordance with 89/336/EWG

Safety standard DIN 61010

Housing

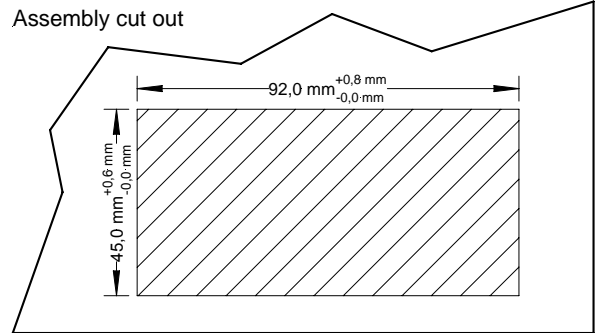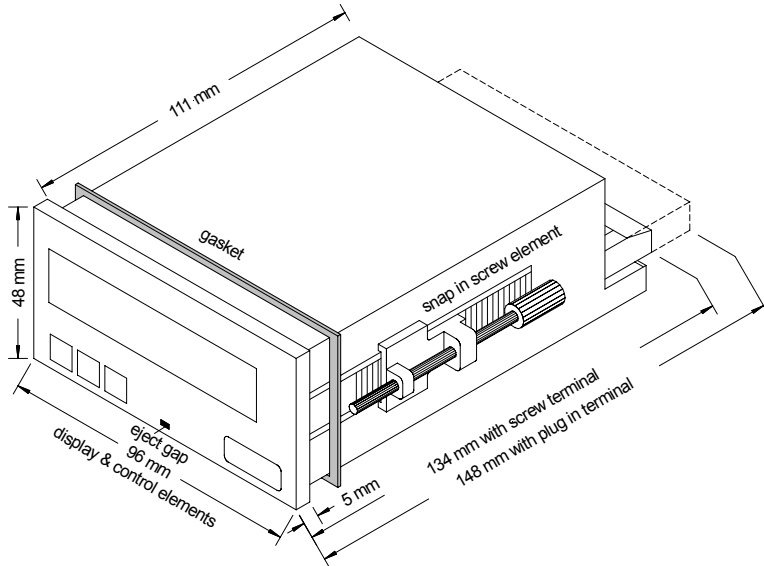

• **Ordering code**

		P	C	6	0	3	0	3	1	7	4	2	B		
Processor device														Version	
														<input type="checkbox"/> B	Version B
Type														Switching points	
Counter	<input type="checkbox"/> C													<input type="checkbox"/> 2	2 switching points
Number of digits														Mechanical options	
6 digits	<input type="checkbox"/> 6													<input type="checkbox"/> 1	Keypad, protection IP65, screw terminal
Interface														<input type="checkbox"/> 4	Keypad, protection IP54, screw terminal
not available	<input type="checkbox"/> 0													<input type="checkbox"/> 7	Keypad, protection IP65, plug-in terminal
														<input type="checkbox"/> 9	Keypad, protection IP54, plug-in terminal
Sensor supply														Power supply	
24 VDC / 15 mA	<input type="checkbox"/> 3													<input type="checkbox"/> 4	115 VAC
														<input type="checkbox"/> 5	230 VAC
														<input type="checkbox"/> 7	24 VDC (galvanic isolated)
Analog output														Size of housing	
not available	<input type="checkbox"/> 0													<input type="checkbox"/> 1	96x48 mm (BxH)
														<input type="checkbox"/> 3	Counter