

# ADJUSTABLE PRESSURE SWITCH SPDT TYPE PS271

Max Voltage: 250 Volt  
 Current: 6 A Resistive  
 Certification: CE  
 Contact: Changeover SPDT  
 Standard materials: Zinc plated steel Body  
 HNBR membrane  
 Switch housing Nylon 6/6  
 Silver plated Contact


Electrical protection: IP65 with DIN43650 Connector  
 Mechanical life: 10<sup>6</sup> cycles (Membrane)  
 Pressure Setting: Internal screw  
 Mounting: Hexagonal body Sw 27



Rev.05/2016

## ORDERING CODE

**PS271 50 ZP V S 14 T42**

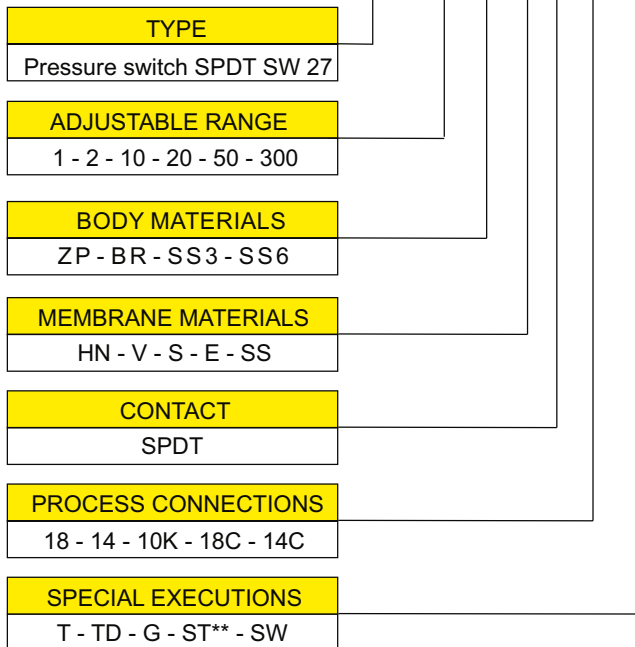

## CODE EXPLANATION

**TYPE**  
 PS271 Adjustable Pressure Switch SPDT SW 27

**RANGE**

1	0,1 ÷ 1 bar (max. working pressure 10 bar)
2	0,2 ÷ 2 bar
10	1,5 ÷ 10 bar
20	9 ÷ 20 bar
50	15 ÷ 50 bar
300	40 ÷ 300 bar

**BODY MATERIALS**

ZP Zinc plated steel (standard)  
 BR Brass (P. Max 80 bar)  
 SS3 Stainless steel AISI 303  
 SS6 stainless steel AISI 316

**MEMBRANE/GASKET MATERIALS - TEMPERATURE**

HN HNBR -20 ... +120 °C (standard)  
 NB NBR -20 ... +90 °C  
 V FKM -25 ... +120 °C  
 S Silicone -40 ... +140 °C  
 E EPDM -20 ... + 120 °C  
 SS Inox -30 ... +140 °C

**CONTACT**


S Changeover SPDT

**PROCESS CONNECTIONS Quote A**

18 1/8 Gas Taper  
 14 1/4 gas Taper  
 10K M10 x 1 Taper  
 18C 1/8 Gas Parallel  
 14C 1/4 Gas Parallel

**SPECIAL EXECUTIONS**

T Rising set point @ indicated value  
 TD Falling set point @ indicated value  
 G Gold plated Contact for low current  
 SG Degreased for oxygen  
 ST\*\* Special threads (NPT, SAE, Metrico etc...)  
 SW Special wiring (Automotive, Integrated/free connector etc...)

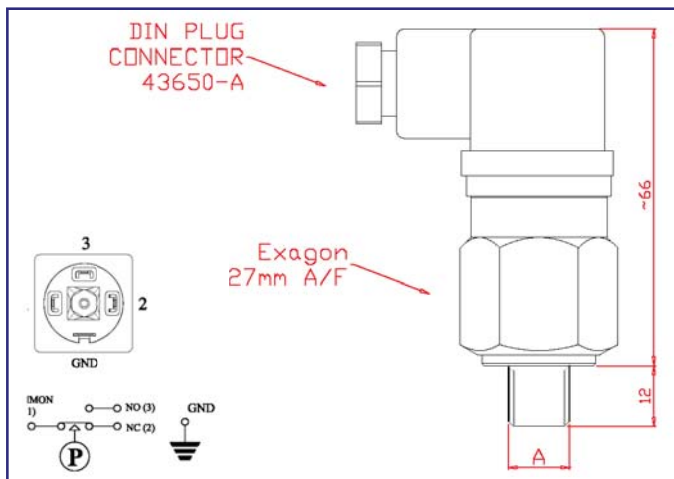

Type	Adjustable range (bar rel.)	Maximum static pressure	Hysteresis @ 25°C (bar)	Set Point Tolerance @ 25°C (bar)	Execution
<b>PS271</b>					
1	0,1 ÷ 1	350 bar	30% SPV*	±0,08	Membrane
2	0,2 ÷ 2	350 bar	30% SPV*	±0,15	Membrane
10	1,5 ÷ 10	350 bar	30% SPV*	±0,8	Membrane
20	9 ÷ 20	350 bar	30% SPV*	±1,0	Membrane
50	15 ÷ 50	350 bar	30% SPV*	±2,0	Membrane
300	40 ÷ 300	600 bar	30% SPV*	±15	Piston

\* Set Point Value