



Type Approval Certificate

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the GL Type Approval System.

Certificate No. **24 770 - 05 HH**

Company **Trafag AG**
Emil-Staub-Strasse 1
8708 Männedorf, SWITZERLAND

Product Description **Pressure Transmitter EPTCR**

Type **8242.xx.20.yy.zz.79**
8282.xx.20.yy.04.79 (inversed electrical connection)

Environmental Category **D, H, EMC1**

Technical Data /
Range of Application **Sensor: thin film on steel**
Power supply: 24V DC (9...32V DC)
Signal output: 4...20 mA, two wire, loop powered
Pressure ranges (xx): 0...1000 to 0...2000 bar
Accuracy (20): standard max. 1%, calibration temp. 60°C
(see manufacturer's data sheet for more details)
Process connection (yy): male M18x1.5
Electrical connection (zz): DIN 43650-A or DIN 72585 plug
fixed PUR-cable, standard length 1.5m
Degree of protection: IP65 (plug DIN 43650-A) / IP67 (plug DIN 72585)
IP68 (fixed cable)
Wetted parts: stainless steel 1.4542 (AISI630), housing 1.4301 (AISI304),
O-Ring Viton 70°Sh
***(Env. Cat. 'H'): vibration test: 5Hz to 20Hz amplitude = 9.3 mm**
20Hz to 2kHz acceleration = 15g
Requirement class: 3

Test Standard **Guidelines for the Performance of Type Approvals, Chapter 2 - Edition 2003**

Documents **Test reports: Trafag V-0317, EMC-Testcenter EMCKP155A**
Test reports: ILK Dresden 171/2004, 183/2004 191/2004, Trafag V-0450
Technical data sheets: 2.3.1.9 (03/2006)
Circuit diagrams; Construction drawings, Software documentation

Remarks **None**

Valid until **2015-02-22**

Page **1 of 1**

File No. **I.D.01**

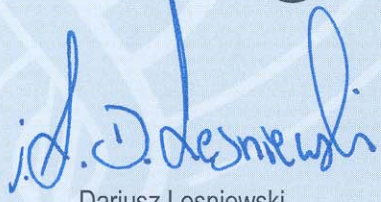
Hamburg, 2010-02-23

Type Approval Symbol



Germanischer Lloyd


Marco Rinkel


Dariusz Lesniewski

This certificate is issued on the basis of "Guidelines for the Performance of Type Approvals Part 1, Procedure".